



# Filtro Senoidal

Filtro Senoidal para Saída de Inversores de Frequência

Corrente de Saída do Inversor (A)	Tensão de Saída do Inversor (V)	Comprimento Máximo Cabo Blindado (m)	Comprimento Máximo Cabo Não Blindado (m)	A máx (mm)	B máx (mm)	C máx (mm)	Massa (kg)	Modelo	Item Pólux
6	380-480	500	1000	180	180	160	7	A	9.01.02.4884
15	380-480	500	1000	260	280	250	12	A	9.01.02.4885
25	380-480	500	1000	260	280	280	15	A	9.01.02.4886
50	380-480	500	1000	260	285	280	20	B	9.01.02.4887
95	380-480	500	1000	350	310	300	35	B	9.01.02.4888
180	380-480	500	1000	350	310	385	60	B	9.01.02.4889
305	380-480	500	1000	390	400	510	85	B	9.01.02.4890

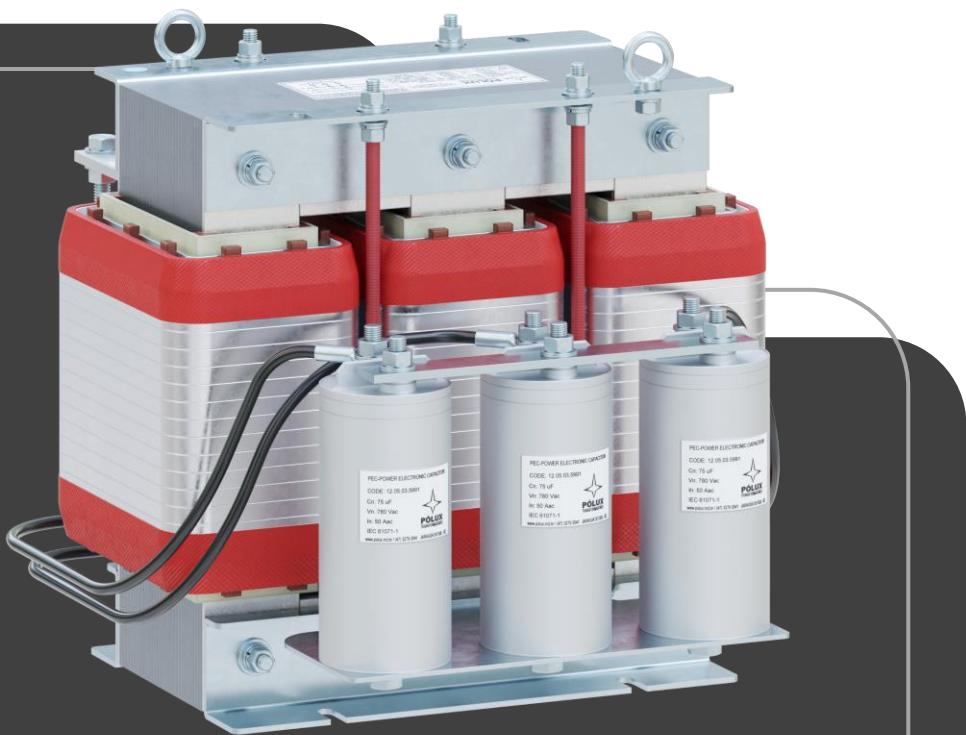

Modelo A

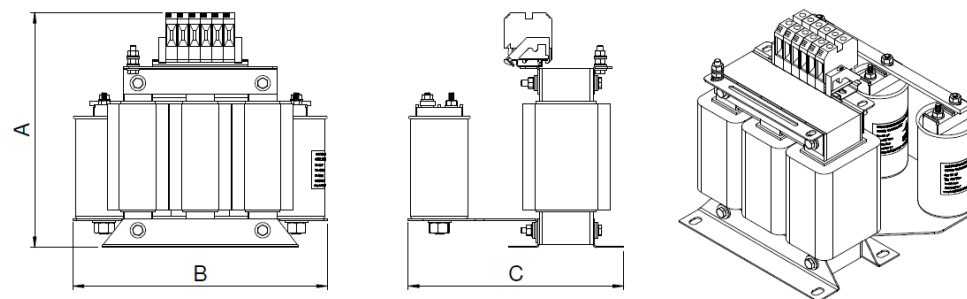

Modelo B

